

TABLE OF CONTENTS



	page		page
Technical information	2 to 3	CATALOGS FOR OTHER SIPEL LINES	43
Complementary information	4	QUICK CHANGE SOFT TIP TWEEZERS	
Coatings available	5	QUICK CHANGE CERAMIC TIP TWEEZERS	
TEFLON	6	PLIERS CUTTERS and SPECIAL APPLICATIONS	
HTC	7	Miscellaneous Tools	
ERGO FOAM	8	MINI-SPATULAS	44
BLACK EPOXY	9	SCISSORS	45 to 47
Mini Steel Tweezers	10 to 11	FORCEPS	48 to 50
Steel Tweezers - six grades	12 to 20	SCALPEL HANDLES & BLADES	51
BIO-MED		MISCEL. SPATULAS	52
BIO-TECH		MIRRORS	52
ZENITH		MICRO SCREWDRIVERS	53
PREMIUM			
PRIME-X			
SL PRIME-X			
Reverse Action Steel Tweezers	21 to 22	Vacuum Pick-Up Tools and Accessories	55 to 77
Nickel Plated Serrated Tips Tweezers	23	Self Contained Vacuum Handling Tools	
Brass Tweezers	24	PEN-VAC Family	56 to 63
Wafers and CDs Handling Tweezers	25 to 29	SLIM-VAC	63
SMD Tweezers	30 to 33	VACULA	64
Components Handling Tweezers	34 to 35	HP300-ESD	64
Micro Cutting Tweezers	36	PINCH-VAC	64
Flush Cutting Tweezers	37 to 40	HANDY-VAC	65
Plastic Tweezers	41 to 42	BULB-VAC	65
WHITE DELRIN 500		CUPS & PROBES (Selection of Tips)	66 to 71
GREY STATIC DISSIPATIVE			
BLACK STATIC DISSIPATIVE		Continuous Vacuum Handling Tools	
ESD BLACK CONDUCTIVE		PAC-VAC	72
		SMD-VAC	72
		STEALTH -VAC	73
		STEALTH-WAND	73
		PORTA-VAC	73
		PORTA-WAND	74
		PORTA-WAND ELITE	75
		MISCEL. HANDLES	76
		MISCEL. WAFER TIPS	77
		MISCEL. ACCESSORIES	78
		Desoldering Braids	79
		Lotions and Containers	80
		Numerical Index	81 to 83

TECHNICAL INFORMATION



TWEEZERS MATERIALS

No Suffix = Carbon Steel

-S = Stainless Steel

-SA = Stainless Antiacid Antimagnetic Steel

-N = Nickel Silver

-NI = Nickel Plated

-PB = Phosphorus Bronze

-BR = Brass

Example :

3C

3C-S

3C-SA

11-N

AA-Ni

3C-PB

3C-BR

COATINGS

-TE = TEFLON Coating (page 6)

Temperature resistance up to 280°C/520°F

Available on all Steel Tweezers

Example :

2A-SA-TE

-HTC = HTC Coating (page 7)

High temperature resistance up to 620°C/1150°F

Available on all Steel Tweezers

2A-SA-HTC

ERGO-... = Ergonomic Foam Coating (page 8)

Ergonomic Static Dissipative Foam Coating

Available on all Steel Tweezers

ERGO-2A-SA

-EX = Black EPOXY Coating (page 9)

Black Epoxy coating, prevents corrosion

Available on Cutting Tweezers series with EZ Lever

Available on PRIME-X Line Steel Tweezers

2A-SA-EX

STEEL TWEEZERS' SIX GRADES (pages 12-20)

.../BM = Medical Line - BIO MED

.../T = Biology Line - BIO-TECH

.../S = High Tech Electronic Line - ZENITH

.../E = Electronic Line - PREMIUM

.../P = Low Cost PRIME-X Line

SL.../P = SUPER LIGHT PRIME-X Line

Example :

3C-SA/BM

3C-SA/T

3C-SA/S

3C-SA/E

3C-SA/P

SL3C-SA/P

TECHNICAL INFORMATION

OPTIONS

Prefix **R** = Reverse Action Tweezers (pages 21, 22 & 33)

Suffix **-D** = Inside Serrated Tips

Suffix **-AP** = Adjustable Pressure(see below)

Example :

R2A-SA

2A-SA-D

R2A-SA-AP



WHAT IS EZ LEVER ? (pages 38-40)

Supreme Ergonomic Tool design

EZ Lever makes cutting and handling much "easier"

EZ Lever is perfect for either right or left handed operators

EZ Lever enables better visibility and access

EZ Lever reduces fatigue

EZ Lever fits on all cutting tweezers as well as on steel tweezers

Suffix **-EZ** = Ergonomic EZ Lever(see below)

Example :

3C-SA-EZ



ERGONOMIC ANTI-FATIGUE EZ LEVER



EZ-5-ESD



EZ-3-ESD



EZ-2-ESD



EZ-1-ESD

COMPLEMENTARY INFORMATION



MINI STEEL TWEEZERS (pages 10-11)

Very small, light weight, ergonomic design

NICKEL PLATED SERRATED TIPS TWEEZERS (page 23)

Stainless Steel, Hardened Tip

BRASS TWEEZERS (page 24)

Anti-Sparking Solid Brass
Soft, for handling delicate parts

WAFERS AND CDs HANDLING TWEEZERS (pages 25-29)

Stainless Antiacid Antimagnetic Steel
Large range for handling any Wafers'sizes

SMD TWEEZERS (pages 30-33)

Specially designed for Surface Mounted Devices
Excellent for handling chips, ceramic devices and all small parts.
Stainless Antiacid Antimagnetic Steel

COMPONENTS HANDLING TWEEZERS (pages 34-35)

Stainless Antiacid Antimagnetic Steel
Insertion-Extraction Tools

MICRO CUTTING TWEEZERS (page 36)

Stainless Antiacid Antimagnetic Steel
The largest choice for micro wires

FLUSH CUTTING TWEEZERS (pages 37-40)

Hardened Polished Carbon Steel
Black Epoxy Coated with EZ Lever

PLASTIC TWEEZERS (pages 41-42)

Light weight, Light cost, 7 models, 28 versions
Heat resistance 464°F - 240°C
White Delrin 500
Grey Static Dissipative
Black Static Dissipative
Black Conductive

MINI SPATULAS (page 44)

Oilers, standard or ESD Safe
Wide Variety of Applications

SCISSORS (pages 45-47)

Stainless Steel, Shiny Polished

FORCEPS (pages 48-50)

Stainless Steel, Shiny Polished
Plastic Coated or Shiny Polished Handles

SCALPEL HANDLES AND BLADES (page 51)

Stainless Steel
Wide Variety of Blades and Handles

SPATULAS, KNIVES, MIRRORS (page 52)

Stainless Steel
For General Purpose

MICRO SCREWDRIVERS (page 53)

Flat and Cross Blades

VACUUM PICK-UP TOOLS

AND ACCESSORIES (pages 55-78)

Wide range of Self-contained and Continuous
Vacuum Tools, with Accessories

DESOLDERING BRAIDS (page 79)


Complete catalog available upon request

R&R LOTIONS & CONTAINERS (page 80)

Complete catalog available upon request

4 NEW COATINGS FOR TWEEZERS

Available on All Steel Tweezers

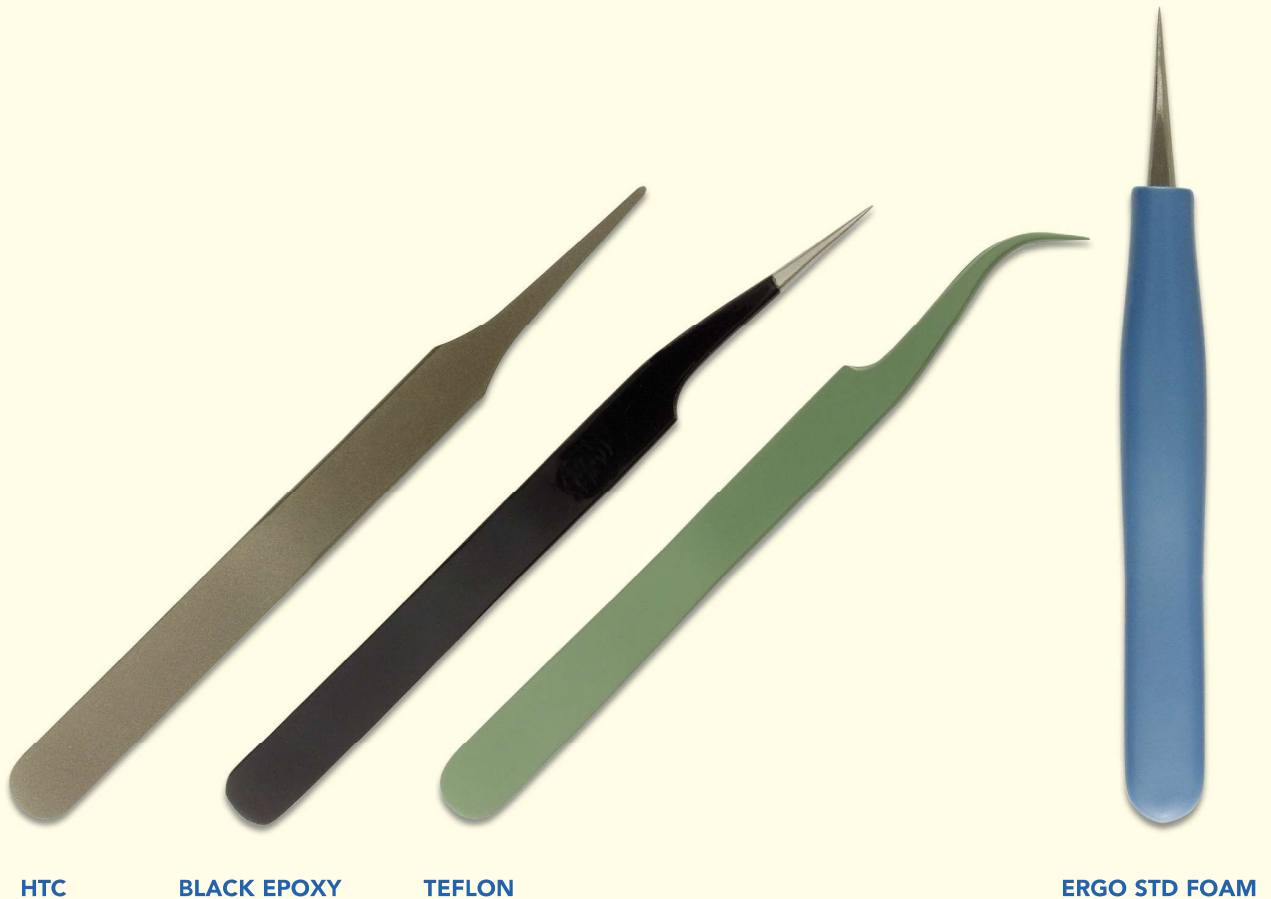

HTC	Suf: -HTC High Temperature Coating Resistance up to 620°C / 1150°F
BLACK EPOXY	Suf: -EX Epoxy Coating 5 mil
TEFLON	Suf: -TE Temperature Coating Resistance up to 280°C / 520°F
ERGO STD FOAM	Préf: ERGO- Ergonomic Static Dissipative Foam Coating

TEFLON COATING

Available on All Steel Tweezers

Temperature coating resistance up to 280°C / 520°F

Suf: -TE



2A-SA-TE -Very Popular Flat Tips	120 mm - 4 ³ / ₄ "	 * 2.0mm - .078"	
3C-SA-TE -Narrow Fine Tips	110 mm - 4 ¹ / ₄ "	 * 0.25mm - .0098"	
7-SA-TE -Curved Very Fine Tips	120 mm - 4 ³ / ₄ "	 * 0.4mm - .0157"	
37S-SA-1-TE -For Wafers and Round Part -2 Prongs	125 mm - 5"	 * 7.0mm - .275"	
300W-SA-TE -For 3" Wafers and Round Parts -3 Prongs	125 mm - 5"	 * 9.0mm - .355"	
400W-SA-TE -For 4" Wafers and CD -4 Prongs	125 mm - 5"	 * 12.5mm - .492"	
500W-SA-TE -For 5" Wafers and CD -5 Prongs	125 mm - 5"	 * 16.0mm - .629"	
600W-SA-TE -For 6" Wafers and CD -6 Prongs	125 mm - 5"	 * 19.50mm - .767"	

Other Models Available Upon Request

HTC COATING

Available on All Steel Tweezers

High Temperature Coating Resistance up to 620°C / 1150°F

Suf: -HTC



Switzerland

2A-SA-HTC

120 mm - 4³/₄"

-Very Popular Flat Tips



* 2.0mm - .078"



3C-SA-HTC

110 mm - 4¹/₄"

-Narrow Fine Tips



* 0.25mm - .0098"




7-SA-HTC

120 mm - 4³/₄"

-Curved Very Fine Tips



* 0.4mm - .0157"



37S-SA-1-HTC

125 mm - 5"

-For Wafers and Round Parts
-2 Prongs



* 7.0mm - .275"



39S-SA-3-HTC

125 mm - 5"

-For Wafers and Round Parts
-3 Prongs
-6 Holes



* 9.0mm - .355"



400W-SA-HTC

125 mm - 5"

-For 4" Wafers and CD
-4 Prongs



* 12.5mm - .492"



500W-SA-HTC

125 mm - 5"

-For 5" Wafers and CD
-5 Prongs



* 16.0mm - .629"



600W-SA-HTC

125 mm - 5"

-For 6" Wafers and CD
-6 Prongs



* 19.50mm - .767"



Other Models Available Upon Request

ERGO STD FOAM COATING

Available on All Steel Tweezers
Ergonomic Static Dissipative Foam Coating
Pref: ERGO-



ERGO-2A-SA -Very Popular Flat Tips	120 mm - 4 ³ / ₄ "	 * 2.0mm - .078"	
ERGO-3C-SA -Narrow Fine Tips	110 mm - 4 ¹ / ₄ "	 * 0.25mm - .0098"	
ERGO-7-SA -Curved Very Fine Tips	120 mm - 4 ³ / ₄ "	 * 0.20mm - .0078"	
ERGO-37S-SA-1 -For Wafers and Round Parts -2 Prongs	125 mm - 5"	 * 7.0mm - .275"	
ERGO-39S-SA-3 -For Wafers and Round Parts -3 Prongs -6 Holes	125 mm - 5"	 * 9.0mm - .355"	
ERGO-400W-SA -For 4" Wafers and CD -4 Prongs	125 mm - 5"	 * 12.5mm - .492"	
ERGO-500W-SA -For 5" Wafers and CD -5 Prongs	125 mm - 5"	 * 16.0mm - .629"	
ERGO-600W-SA -For 6" Wafer and CD -6 Prongs	125 mm - 5"	 * 19.50mm - .767"	

Other Models Available Upon Request

BLACK EPOXY COATING

Available on All Steel Tweezers

Epoxy Coating 5 mils Suf: -EX

One Grade Available: -PRIME-X, Suffix /P Example: 2A-SA-EX/P



2A-SA-EX/P -Very Popular Flat Tips	120 mm - 4 ³ / ₄ "	 * 2.0mm - .078"	
2AB-SA-EX/P -Curved Flat Tips	120 mm - 4 ³ / ₄ "	 * 2.0mm - .078"	
3-SA-EX/P -Fine Tips	120 mm - 4 ³ / ₄ "	 * 0.25mm - .0098"	
3C-SA-EX/P -Narrow Fine Tips	110 mm - 4 ¹ / ₄ "	 * 0.25mm - .0098"	
5-SA-EX/P -Extra Fine, Very Sharp Tips	110 mm - 4 ¹ / ₄ "	 * 0.20mm - .0078"	
5A-SA-EX/P - Extra Fine, Very Sharp Tips	120 mm - 4 ³ / ₄ "	 * 0.35mm - .014"	
7-SA-EX/P -Curved Very Fine Tips	115 mm - 4 ¹ / ₂ "	 * 0.20mm - .0078"	
AA-SA-EX/P -Fine Strong Tips	125 mm - 5"	 * 0.50mm - .020"	

Other Models Available Upon Request

MINI TWEEZERS

Stainless Antiacid Antimagnetic Steel



Very Light Ergonomic Micro Tweezers

Two Grades Available:

ZENITH, Suffix /S

PRIME-X, Suffix /P

Example: MAC-SA/P



MAC-SA

80 mm – 3²/₁₆"

-Thick Short Tips



* 0.30mm - .012"



MH-SA

85 mm – 3⁵/₁₆"

-Very Strong Tips



* 0.50mm - .020"



MHD-SA

80 mm – 3²/₁₆"

-Very Strong Tips



* 0.50mm - .020"



MOC-SA

70 mm – 2³/₄"

-Strong Short Tips



* 0.40mm - .0157"



MOOD-SA

85 mm – 3⁵/₁₆"

-Strong Thick Serrated Tips



* 0.40mm - .0157"



MINI TWEEZERS

Stainless Antiacid Antimagnetic Steel

Two Grades available: ZENITH, Suffix /S
PRIME-X, Suffix /P
Example: M3C-SA/S



MSS-SA -Very Fine Long Tips	90 mm – 3 ⁹ / ₁₆ "	 * 0.35mm - .014"	
M2-SA -Medium Flat Tips	85 mm – 3 ⁵ / ₁₆ "	 * 0.50mm - .020"	
M2A-SA -Very Popular Flat Tips	70 mm – 2 ³ / ₄ "	 * 2.0mm - .078"	
M3C-SA -Narrow Fine Tips	70 mm – 2 ³ / ₄ "	 * 0.25mm - .0098"	
M4-SA -Very Fine Tips	70 mm – 2 ³ / ₄ "	 * 0.30mm - .0127"	
M4A-SA -Fine Tips	85 mm – 3 ⁵ / ₁₆ "	 * 0.40mm - .0157"	
M5-SA -Extra Fine Tips	80 mm – 3 ² / ₁₆ "	 * 0.20mm - .0078"	
M7-SA -Curved Very Fine Tips	95 mm – 3 ³ / ₄ "	 * 0.20mm - .0078"	

Other Models Available Upon Request

STEEL TWEEZERS

Stainless Antiacid Antimagnetic Steel

Six Grades Available

BIO-MED, Suffix /BM

PREMIUM, Suffix /E

BIO-TECH, Suffix /T

PRIME-X, Suffix /P

ZENITH, Suffix /S

SL PRIME-X, Prefix SL...

Example: AA-SA/T



A-SA -Fine Straight	115 mm – 4 1/2"	 * 0.40mm - .0157"	
AA-NI -Fine Strong Tips -Nickel Plated	125 mm – 5"	 * 0.40mm - .0157"	
AA-SA -Fine Strong Tips	125 mm – 5"	 * 0.40mm - .0157"	
AC-SA -Fine Strong Tips	110 mm – 4 1/4"	 * 0.30mm - .012"	
GG-SA -Very Fine Tips	125 mm – 5"	 * 0.40mm - .0157"	
HH-NI -Strong Tips -Nickel Plated	110 mm – 4 1/4"	 * 0.40mm - .0157"	
MM-NI -Strong Multipurpose -Nickel Plated	125 mm – 5"	 * 0.50mm - .020"	
MM-SA -Strong Multipurpose	125 mm – 5"	 * 0.50mm - .020"	
NN-NI -Fine Tips -Nickel Plated	125 mm – 5"	 * 0.50mm - .020"	

STEEL TWEEZERS

Stainless Antiacid Antimagnetic Steel

Six Grades Available

BIO-MED, Suffix /BM

BIO-TECH, Suffix /T

ZENITH, Suffix /S

Example: OO-SA/S

PREMIUM, Suffix /E

PRIME-X, Suffix /P

SL PRIME-X, Prefix SL...



OO-SA

120 mm – 4³/₄"

-Fine Straight Strong Tips



* 0.40mm - .0157"



OC-SA

90 mm – 3⁹/₁₆"

-Strong Short Tips



* 0.40mm - .0157"



OC10-SA

100 mm – 4"

OC11-SA

110 mm – 4¹/₄"

* 0.40mm - .0157"

OO-SA

120 mm – 4³/₄"

-Strong Thick Tips



* 0.40mm - .0157"



OO-NI

115 mm – 4¹/₂"

-Fine Tips

-Nickel Plated



* 0.30mm - .012"



OOB-SA

120 mm – 4³/₄"

- Fine Straight Strong Tips



* 0.40mm - .0157"



OOD-SA

120 mm – 4³/₄"

-Strong Thick Serrated Tips



* 0.40mm - .0157"



OOO-SA

120 mm – 4³/₄"

-Strong Thick Rounded Tips



* 0.30mm - .012"



PSF-SA

130 mm – 5¹/₈"

-Flat Square Tips



* 2.30mm - .090"



STEEL TWEEZERS

Stainless Antiacid Antimagnetic Steel

Six Grades Available

BIO-MED, Suffix /BM

BIO-TECH, Suffix /T

ZENITH, Suffix /S

Example: 1-SA/BM

PREMIUM, Suffix /E

PRIME-X, Suffix /P

SL PRIME-X, Prefix SL...



RR-SA -Heavy Straight Tips	145 mm – 5 ³ / ₄ "	 * 0.50mm - .020"	
SS-SA -Long Tweezers -Very Fine Tips	140 mm – 5 ¹ / ₂ "	 * 0.30mm - .012"	
SSL-SA -Very Long Tweezers -Very Fine Tips	150 mm - 6"	 * 0.40mm - .015"	
SSXL-SA -Extra Long Tweezers -Fine Tips	205 mm - 8"	 * 0.50mm - .020"	
ZA -Carbon Hardened Strong Fine Tips	120 mm – 4 ³ / ₄ "	 * 0.35mm - .014"	
1-SA -Multipurpose Fine Tips	115 mm – 4 ¹ / ₂ "	 * 0.30mm - .012"	
1B-SA -Serrated Tips	115 mm – 4 ¹ / ₂ "	 * 0.30mm - .012"	
2-SA -Medium Flat Tips	115 mm – 4 ¹ / ₂ "	 * 0.50mm - .020"	
2A-SA -Very Popular Flat Tips	120 mm – 4 ³ / ₄ "	 * 2.00mm - .078"	

STEEL TWEEZERS Stainless Antiacid Antimagnetic Steel

Six Grades Available

BIO-MED, Suffix /BM

BIO-TECH, Suffix /T

ZENITH, Suffix /S

PREMIUM, Suffix /E

PRIME-X, Suffix /P

SL PRIME-X, Prefix SL...

Example: 3C-SA/E



2AB-SA -Curved Flat Tips	115 mm – 4 ¹ / ₂ "	 * 2.00mm - .078"	
2A-N -Flat Round Tips -Nickel Alloy	120 mm – 4 ³ / ₄ "	 * 2.00mm - .078"	
2AB-N -Curved Flat Tips -Nickel Alloy	115 mm – 4 ¹ / ₂ "	 * 2.00mm - .078"	
3-SA -Fine Tips	120 mm – 4 ³ / ₄ "	 * 0.25mm - .0098"	
3C-SA -Narrow Fine Tips	110 mm – 4 ¹ / ₄ "	 * 0.25mm - .0098"	
3CB-SA -Narrow Fine Bent Tips	100 mm – 4"	 * 0.25mm - .0098"	
4-SA -Very Fine Tips	110 mm – 4 ¹ / ₄ "	 * 0.30mm - .012"	
4A-SA -Fine Tips	110 mm – 4 ¹ / ₄ "	 * 0.40mm - .0157"	
5-SA -Extra Fine, Very Sharp Tips	110 mm – 4 ¹ / ₄ "	 * 0.20mm - .0078"	

STEEL TWEEZERS

Stainless Antiacid Antimagnetic Steel

Six Grades Available

BIO-MED, Suffix /BM

BIO-TECH, Suffix /T

ZENITH, Suffix /S

PREMIUM, Suffix /E

PRIME-X, Suffix /P

SL PRIME-X, Prefix SL...

Example: SL7-SA



5A-SA	120 mm – 4 ³ / ₄ "	 * 0.35mm - .014"	
5B-SA	110 mm – 4 ¹ / ₄ "	 * 0.40mm - .0157"	
5C-SA	115 mm – 4 ¹ / ₂ "	 * 0.20mm - .0078"	
6-SA	110 mm – 4 ¹ / ₄ "	 * 0.40mm - .0157"	
7-SA	115 mm – 4 ¹ / ₂ "	 * 0.20mm - .0078"	
7A-SA	120 mm – 4 ³ / ₄ "	 * 0.30mm - .012"	
7B-SA	120 mm – 4 ³ / ₄ "	 * 0.40mm - .0157"	
7C-SA	95 mm – 3 ³ / ₄ "	 * 0.20mm - .0078"	
11-N	120 mm – 4 ³ / ₄ "	 * 0.40mm - .0157"	

STEEL TWEEZERS

Stainless Antiacid Antimagnetic Steel

Six Grades Available

BIO-MED, Suffix /BM

BIO-TECH, Suffix /T

ZENITH, Suffix /S

PREMIUM, Suffix /E

PRIME-X, Suffix /P

SL PRIME-X, Prefix SL...

Example: 24-SA/P



Switzerland

12-N

120 mm – 4³/₄"

- Fine Tips
- Nickel Alloy




* 0.30mm - .012"



12A-SA

115 mm – 4¹/₂"

- Flat Bowed Tips



* 2.00mm - .078"



20A-SA

115 mm – 4¹/₂"

- With Alignment Pin
- Strong Fine Serrated Tips



* 1.00mm - .0394"



21-SA/150 mm – 6"
21-SA/200 mm – 8"
21-SA/250 mm – 10"
21-SA/300 mm – 12"

- Strong Rounded Tips



* 2.00mm - .078"



23-SA

160 mm – 6¹/₄"

- With Alignment Pin
- Curved Tips



* 1.20mm - .047"



24-SA

155 mm – 6²/₁₆"

- With Alignment Pin
- Fine Bent Tips



* 0.80mm - .032"



25-SA

120 mm – 4³/₄"

- Thin Tips



* 4.00mm - .157"



26-SA

115 mm – 4¹/₂"

- Round Tips



* 6.00mm - .235"



STEEL TWEEZERS

Stainless Antiacid Antimagnetic Steel

Six Grades Available

BIO-MED, Suffix /BM

BIO-TECH, Suffix /T

ZENITH, Suffix /S

Example: 35A-SA/S

PREMIUM, Suffix /E

PRIME-X, Suffix /P

SL PRIME-X, Prefix SL...



34-SA

120 mm – 4³/₄"

-Flat Straight Tips



* 3.00mm - .118"



34A-SA

120 mm – 4³/₄"

-Flat Straight Tips



* 6.50mm - .256"



34B-SA

120 mm – 4³/₄"

-Flat Angled Tips



* 2.50mm - .098"



34B-SA-M

120 mm – 4³/₄"

-Flat Angled Tips



* 3.50mm - .14"



35A-SA

120 mm – 4³/₄"

-For Handling Delicate Electronics Parts



* 6.00mm - .235"



35B-SA

120 mm – 4³/₄"

-Small Curved Tips



* 1.40mm - .055"



35AD-SA

120 mm – 4³/₄"

-Fine Straight Serrated Tips



* 6.00mm - .235"



36A-SA

120 mm – 4³/₄"

-Flat Angled Tips



* 6.00mm - .235"



STEEL TWEEZERS

Stainless Antiacid Antimagnetic Steel



Six Grades Available

BIO-MED, Suffix /BM

BIO-TECH, Suffix /T

ZENITH, Suffix /S

Example: 51-SA/BM

PREMIUM, Suffix /E


PRIME-X, Suffix /P

SL PRIME-X, Prefix SL...

36A-SA-R

120 mm – 4³/₄"


-Flat Angled Round End Tips



38-SA

110 mm – 4¹/₄"


-Excellent For Pick Up Miniature Round Wire



39-SA

110 mm – 4¹/₄"


-Excellent For Pick Up Miniature Round Wire



40-SA

110 mm – 4¹/₄"


-Excellent For Pick Up Miniature Round Wire



47-SA

135 mm – 5¹/₄"


-Strong Flat Square Tips, Very Popular



51-SA

115 mm – 4¹/₂"


-Superfine Bent Tips



52A-SA

120 mm – 4³/₄"


-Flat Tips
-Smooth Action



64-SA

115 mm – 4¹/₂"


-Very Fine Tweezer



65A-SA

140 mm – 5¹/₂"

-Very Fine Bent Tips



STEEL TWEEZERS

Stainless Antiacid Antimagnetic Steel

Six Grades Available

BIO-MED, Suffix /BM

BIO-TECH, Suffix /T

ZENITH, Suffix /S

PREMIUM, Suffix /E

PRIME-X, Suffix /P

SL PRIME-X, Prefix SL...

Example: 231-SA/E



218-SA

160 mm – 6 1/4"

- With Alignment Pin
- Diamond Style, Fine Tips



* 0.60mm - .0235"



219-SA

160 mm – 6 1/4"

- With Alignment Pin
- Diamond Style, Medium Tips



* 0.80mm - .032"



220-SA

140 mm – 5 1/2"

- With Alignment Pin
- Diamond Style, Medium Tips



* 0.90mm - .035"



220C-SA

140 mm – 5 1/2"

- With Alignment Pin
- Diamond Style, Medium Bent Tips



* 0.90mm - .035"



227-SA

140 mm – 5 1/2"

- Diamond Style, Medium Tips
- Slide Lock



* 1.00mm - .0394"



231-SA

120 mm – 4 3/4"

- Fine Straight Tips



* 0.60mm - .0235"



231A-SA

120 mm – 4 3/4"

- Fine Straight Serrated Tips



* 0.60mm - .0235"



245-SA

145 mm – 5 3/4"

- Strong Serrated Tips




* 3.50mm - .137"



251A-SA

165 mm – 6 1/2"

- Long Flat Rounded End Tips



* 6.00mm - .235"



Other Models Available Upon Request

REVERSE ACTION TWEEZERS

Stainless Antiacid Antimagnetic Steel

Two Grades Available: ZENITH, Suffix /S
PRIME-X, Suffix /P
Example: R3-SA/S



R1-SA -Multipurpose Fine Tips	125 mm – 5"	 * 0.30mm - .012"	
R2A-SA -Very Popular Flat Tips	115 mm – 4 1/2"	 * 2.00mm - .078"	
R2A-SA-AP -Adjustable Screw Pressure	115 mm – 4 1/2"	 * 2.00mm - .078"	
R3-SA -Fine Tips	120 mm – 4 3/4"	 * 0.40mm - .0157"	
R5-SA -Extra Fine, Very Sharp Tips	115 mm – 4 1/2"	 * 0.20mm - .0078"	
R5A-SA -Fine, Very Sharp Tips	110 mm – 4 1/4"	 * 0.30mm - .012"	
R7-SA -Curved Very Fine Tips	115 mm – 4 1/2"	 * 0.40mm - .0157"	

REVERSE ACTION TWEEZERS

Stainless Antiacid Antimagnetic Steel

Two Grades Available: ZENITH, Suffix /S

PRIME-X, Suffix /P

Example: R218-SA/P



R28-SA -Strong Tips	160 mm – 6 ¹ / ₄ "	 * 3.00mm - .120"	
R28F-SA -Flat Strong Tips	160 mm – 6 ¹ / ₄ "	 * 4.50mm - .177"	
R29-SA -Straight Tips	160 mm – 6 ¹ / ₄ "	 * 2.50mm - .098"	
R29D-SA/14-16 R29D-SA/22 R29D-SA/28 R29D-SA/40 -For Handling DIP -Other Sizes Available	145 mm – 5 ³ / ₄ "	 * 2.00mm - .078"	
R30-SA -Bent Tips	160 mm – 6 ¹ / ₄ "	 * 2.50mm - .098"	
R30D-SA/14-16 R30D-SA/22 R30D-SA/28 R30D-SA/40 -Bent Tips, For Handling DIP -Other Sizes Available	150 mm – 6"	 * 2.00mm - .078"	
R218-SA -Medium Tips	160 mm – 6 ¹ / ₄ "	 * 1.20mm - .0472"	
R218B-SA -Medium Curved Tips	155 mm – 6 ² / ₁₀ "	 * 1.20mm - .0472"	

Other Models Available Upon Request

NICKEL PLATED SERRATED TIPS TWEEZERS



Switzerland

Stainless Steel

81083 115 mm – 4 1/2" -Inside Serrated Fine Straight Tips	 * 0.60mm - .0236"	
81084 130 mm – 5 1/8" -Inside Serrated Strong Tips	 * 2.00mm - .0787"	
81085 115 mm – 4 1/2" -Inside Serrated Fine Bent Tips	 * 0.60mm - .0236"	
81333 115 mm – 4 1/2" -Inside Serrated Fine Straight Tips	 * 0.60mm - .0236"	

BRASS TWEEZERS Anti Sparking Solid Brass

Soft for Handling Delicate Parts

Two Grades Available: ZENITH, Suffix /S
PRIME-X, Suffix /P
Example: AM-BR/P



AA-BR -Fine Strong Tips	125 mm – 5"	 * 0.60mm - .0235"	
AM-BR -Fine Strong Tips	115 mm – 4 1/2"	 * 0.60mm - .0235"	
P-BR -Fine Tips	125 mm – 5"	 * 0.50mm - .020"	
SS-BR -Very Fine Long Tips	135 mm – 5 1/4"	 * 0.50mm - .020"	
1-BR -Multipurpose Fine Tips	120 mm – 4 3/4"	 * 0.30mm - .012"	
2A-BR -Very Popular Flat Tips	120 mm – 4 3/4"	 * 2.0mm - .078"	
3-BR -Fine Tips	120 mm – 4 3/4"	 * 0.40mm - .0157"	
3C-BR -Narrow Fine Tips	110 mm – 4 1/4"	 * 0.40mm - .0157"	
5-BR -Extra Fine, Very Sharp Tips	110 mm – 4 1/4"	 * 0.40mm - .0157"	
7-BR -Curved Very Fine Tips	115 mm – 4 1/2"	 * 0.50mm - .020"	

Other Models Available Upon Request

WAFER TWEEZERS

Stainless Antiacid Antimagnetic Steel

Large Range of Tweezers for Handling CDs and Wafers of all Sizes



37S-SA-1

120 mm – 4³/₄ "

- For Wafers and Round Parts
- 2 Prongs



* 7.50mm - .295"



37S-SA-L

120 mm – 4³/₄ "

- Long Upper Tip
- For Wafers and Round Parts
- 2 Prongs



* 7.50mm - .295"



39S-SA-3

120 mm – 4³/₄ "

- For Wafers and Round Parts
- 3 Prongs
- 6 Holes



* 9.00mm - .354"



62A-SA

115 mm – 4¹/₂ "

- For Wafers and Round Parts
- Straight



* 2.00mm - .078"



72A-SA

115 mm – 4¹/₂ "

- For Wafers and Round Parts
- Angulated



* 2.00mm - .078"



85A-SA

120 mm – 4³/₄ "

- For Wafers and Round Parts
- Straight



* 6.50mm - .256"



85C-SA

120 mm – 4³/₄ "

- For Wafers and Round Parts
- Straight



* 6.00mm - .235"



86B-SA

120 mm – 4³/₄ "

- For Wafers and Round Parts
- Angulated



* 6.00mm - .235"



WAFER TWEEZERS

Stainless Antiacid Antimagnetic Steel


Large Range of Tweezers for Handling CDs and Wafers of all Sizes



200A-SA

120 mm – 4³/₄"

-For 2" Wafers and Round Parts




* 5.50mm - .216"



200J-SA

120 mm – 4³/₄"

-For 2" Wafers and Round Parts
-Free Floating Teflon Paddle




* 6.50mm - .256"



200W-SA

120 mm – 4³/₄"

-For 2" Wafers and Round Parts
-2 Prongs




* 6.50mm - .256"



300-SA

125 mm – 5"

-For 3" Wafers and Round Parts




* 11.00mm - .433"



300A-SA

125 mm – 5"

-For 3" Wafers and Round Parts




* 9.50mm - .374"



300E-SA

125 mm – 5"

-For 3" Wafers and Round Parts
-3 Prongs




* 9.50mm - .374"



300J-SA

125 mm – 5"

-For 3" Wafers and Round Parts
-Free Floating Teflon Paddle




* 9.50mm - .374"



300W-SA

125 mm – 5"

-For 3" Wafers and Round Parts
-3 Prongs



* 9.50mm - .374"



WAFER TWEEZERS

Stainless Antiacid Antimagnetic Steel


Large Range of Tweezers for Handling CDs and Wafers of all Sizes



400-SA

125 mm – 5"

-For 4" Wafers and CD




* 13.50mm - .531"



400A-SA

125 mm – 5"

-For 4" Wafers and CD




* 12.50mm - .492"



400E-SA

125 mm – 5"

-For 4" Wafers and CD
-4 Prongs




* 12.50mm - .492"



400J-SA

125 mm – 5"

-For 4" Wafers and CD
-Free Floating Teflon Paddle




* 12.50mm - .492"



400W-SA

125 mm – 5"

-For 4" Wafers and CD
-4 Prongs




* 12.50mm - .492"



400WG-SA

125 mm – 5"

-For 4" Wafers and CD
-4 Prongs
-With a Gap 6 mm - .235"



* 12.50mm - .492"



500-SA

130 mm – 5 1/8"

-For 5" Wafers and CD




* 17.00mm - .669"



500A-SA

125 mm – 5"

-For 5" Wafers and CD



* 16.00mm - .629"



WAFER TWEEZERS

Stainless Antiacid Antimagnetic Steel


Large Range of Tweezers for Handling CDs and Wafers of all Sizes



500E-SA

125 mm – 5"


- For 5" Wafers and CD
- 5 Prongs



500J-SA

125 mm – 5"


- For 5" Wafers and CD
- Free Floating Teflon Paddle



500W-SA

125 mm – 5"


- For 5" Wafers and CD
- 5 Prongs



500WG-SA

125 mm – 5"


- For 5" Wafers and CD
- 5 Prongs
- With a Gap 9 mm - .354"



600-SA

130 mm – 5 1/8"


- For 6" Wafers and CD



600A-SA

125 mm – 5"


- For 6" Wafers and CD



600E-SA

125 mm – 5"


- For 6" Wafers and CD
- 6 Prongs



600GB-SA

125 mm – 5"

- For 6" Wafers and CD
- Stop Opening



WAFER TWEEZERS

Stainless Antiacid Antimagnetic Steel


Large Range of Tweezers for Handling CDs and Wafers of all Sizes



600J-SA

125 mm – 5"

- For 6" Wafers and CD
- Free Floating Teflon Paddle




* 19.50mm - .767"



600W-SA

125 mm – 5"

- For 6" Wafers and CD
- 6 Prongs




* 19.50mm - .767"



600WG-SA

125 mm – 5"

- For 6" Wafers and CD
- 6 Prongs
- With a Gap 11 mm -. 433"




* 19.50mm - .767"



800A-SA

150 mm – 6"

- For 8" Wafers and CD




* 27.00mm - 1.062"



800E-SA

150 mm – 6"

- For 8" Wafers and CD
- 8 Prongs




* 27.00mm - 1.062"



800W-SA

150 mm – 6"

- For 8" Wafers and CD
- 8 Prongs




* 27.00mm - 1.062"



800WG-SA

150 mm – 6"

- For 8" Wafers and CD
- 8 Prongs
- With a Gap 17mm -. 669"



* 27.00mm - 1.062"



Other Models Available Upon Request

SMD TWEEZERS

Stainless Antiacid Antimagnetic Steel

Especially designed for Surface Mounted Devices


Teflon coating available, add "TE"



SMD10-SA

120 mm – 4³/₄"


-45° Angle



SMD10A-SA

120 mm – 4³/₄"


-45° Angle



SMD20-SA

120 mm – 4³/₄"

-45° Angle



SMD30-SA

120 mm – 4³/₄"

-15° Angle



SMD40-SA


120 mm – 4³/₄"



SMD50-SA

120 mm – 4³/₄"


-45° Angle



SMD60-SA

120 mm – 4³/₄"

-45° Angle



SMD70-SA

120 mm – 4³/₄"

-45° Angle



SMD TWEEZERS

Stainless Antiacid Antimagnetic Steel

Especially designed for Surface Mounted Devices

Teflon coating available, add "TE"



SMD80-SA -15° Angle	120 mm – 4 ³ / ₄ "		
SMD90-SA -15° Angle	120 mm – 4 ³ / ₄ "		
SMD100-SA	120 mm – 4 ³ / ₄ "		
SMD110-SA -15° Angle	120 mm – 4 ³ / ₄ "		
SMD120-SA	120 mm – 4 ³ / ₄ "		
SMD130-SA -45° Angle	120 mm – 4 ³ / ₄ "		
SMD200-SA	120 mm – 4 ³ / ₄ "		
SMD201-SA -45° Angle	120 mm – 4 ³ / ₄ "		

SMD TWEEZERS

Stainless Antiacid Antimagnetic Steel

Especially designed for Surface Mounted Devices

Teflon coating available, add "TE"



SMD202-SA	120 mm – 4 ³ / ₄ "		
SMD203-SA	120 mm – 4 ³ / ₄ "		
SMD204-SA -45° Angle	120 mm – 4 ³ / ₄ "		
SMD205-SA -45° Angle	120 mm – 4 ³ / ₄ "		

REVERSE ACTION SMD TWEEZERS

Stainless Antiacid Antimagnetic Steel

Especially designed for Surface Mounted Devices -Teflon coating available, add "TE"

SMDR10-SA -45° Angle -Reverse Action	120 mm – 4 ³ / ₄ "		
SMDR10A-SA -45° Angle -Reverse Action	120 mm – 4 ³ / ₄ "		
SMDR30-SA -15° Angle -Reverse Action	120 mm – 4 ³ / ₄ "		

REVERSE ACTION SMD TWEEZERS

Stainless Antiacid Antimagnetic Steel
Especially designed for Surface Mounted Devices
Teflon coating available, add "TE"



SMDR250-SA 115 mm – 4 1/2" -Reverse Action		
SMDR251-SA 115 mm – 4 1/2" -45° Angle -Reverse Action		
SMDR252-SA 115 mm – 4 1/2" -Reverse Action		
SMDR253-SA 115 mm – 4 1/2" -Reverse Action		
SMDR254-SA 115 mm – 4 1/2" -45° Angle -Reverse Action		
SMDR255-SA 115 mm – 4 1/2" -Reverse Action		
SMDR256-SA 115 mm – 4 1/2" -Reverse Action		

COMPONENTS HANDLING TWEEZERS

Stainless Antiacid Antimagnetic Steel
Insertion Extraction Tweezers



532B-SA-2 115 mm – 4 1/2" * 2.00 mm – .078" -For Components Ø 2mm – .078"		
571-SA 120 mm – 4 3/4" * 4.00 mm – .157" -For Components Ø 2.5mm – .1" to 5 mm – .2"		
572-SA 120 mm – 4 3/4" * 6.40 mm – .251" -For Components Ø 2.5mm – .1" to 5 mm – .2"		
573-SA 120 mm – 4 3/4" * 6.40 mm – .251" -For Components Ø 2.5mm – .1" to 6 mm – .24" -45° Angle		
574-SA 120 mm – 4 3/4" * 6.40 mm – .251" -Flat Tips		
577-SA 120 mm – 4 3/4" * 2.70 mm – .106" -For Components Ø 3 mm – .12"		
577A-SA 120 mm – 4 3/4" * 2.00 mm – .078" -For Components Ø 1.0 mm – .04" to 1.5 mm – .06"		
578-SA 120 mm – 4 3/4" * 6.40 mm – .251" -For Components Ø 2.5 mm – .1"		

COMPONENTS HANDLING TWEEZERS

Stainless Antiacid Antimagnetic Steel
Insertion Extraction Tweezers



578A-SA 110 mm – 4¹/₄" * 2.30 mm – .090" -For Components Ø 1mm – .04" to 1.5 mm – .06"		
578B-SA 120 mm – 4³/₄" * 6.40 mm – .251" -For Components Ø 1.0mm – .04" to 1.5 mm – .06"		
579-SA 120 mm – 4³/₄" * 6.40 mm – .251" -For Components Ø 2.5mm – .1" -45° Angle		
579A-SA 115 mm – 4¹/₂" * 2.30 mm – .090" -For Components Ø 1.0mm – .04" to 1.5 mm – .06" -45° Angle		
585-SA 145 mm – 5³/₄" * 4.00 mm – .157" -For Extraction		

MICRO CUTTING TWEEZERS

MC Series, for Micro Wires

Stainless Antiacid Antimagnetic Steel



Switzerland

MC16-SA

120 mm – 4³/₄"


-For Micro Soft Wire



MC17-SA

120 mm – 4³/₄"


-For Micro Soft Wire



MC18-SA

120 mm – 4³/₄"

-For Micro Soft Wire



MC19-SA

115 mm – 4¹/₂"


-For Micro Soft Wire



MC20-SA

110 mm – 4¹/₄"

-For Micro Soft Wire



MC21-SA

110 mm – 4¹/₄"


-For Micro Soft Wire



MC22-SA

110 mm – 4¹/₄"

-For Micro Soft Wire



MC23-SA

110 mm – 4¹/₄"


-For Micro Soft Wire



MC24-SA

110 mm – 4¹/₄"


-For Micro Soft Wire



MC25-SA

110 mm – 4¹/₄"

-For Micro Soft Wire



Other Models Available Upon Request

FLUSH CUTTING TWEEZERS

15A Series


Hardened Polished Carbon Steel




Switzerland

D

- Transverse End Cutting
- Nickel Plated Carbon Steel




A = 11.5 mm - .45"
B = 11.5 mm - .45"
C = 95 mm - 3 3/4"



15AC

- Flat Head
- Tip Cutting



A = 7 mm - .28"
B = 8 mm - .30"
C = 115 mm - 4 1/2"




15AP

- Flat Head
- Parallel Cutting

15AP-SA

- same as above
- Stainless Antiacid Antimagnetic Steel




A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



15AP-T

- Flat Head
- Parallel Cutting
- CARBIDE BLADES




A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



15A-FW

- Flat Head
- Tip Cutting



A = 9 mm - .35"
B = 8 mm - .30"
C = 115 mm - 4 1/2"




15A-GW

- Flat Head
- Tip Cutting

15A-GW-SA

- same as above
- Stainless Antiacid Antimagnetic Steel




A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



15A-NW

- Rounded Head
- Tip Cutting



A = 9 mm - .35"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



15A-SW


- Rounded Head
- Tip Cutting

15A-SW-SA

- Stainless Antiacid Antimagnetic Steel

15AP-SW

- Rounded Head
- Parallel Cutting



A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"




FLUSH CUTTING TWEEZERS

Miniature 215A Series
Hardened Polished Carbon Steel



215A

-Flat Head
-Micro Cut




A = 5.5 mm - .22"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



215AS

-Rounded Head
-Micro Cut




A = 5.5 mm - .22"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



215ASM

-Rounded Head
-Micro Cut




A = 3.5 mm - .10"
B = 6.5 mm - .25"
C = 115 mm - 4 1/2"



215B

-Flat Head
-Micro Cut



A = 2.5 mm - .10"
B = 4.5 mm - .18"
C = 115 mm - 4 1/2"




FLUSH CUTTING TWEEZERS

15A and Miniature 215A Series
Black Epoxy Coated With Patented EZ Lever

15AC-EZ

-Flat Head
-Tip Cutting
-Black Epoxy Coated




A = 7 mm - .28"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



15A-GW-EZ

-Flat Head
-Tip Cutting
-Black Epoxy Coated




A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



15AP-EX

-Flat Head
-Parallel Cutting
-Black Epoxy Coated




A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



15AP-EZ

-Flat Head
-Parallel Cutting
-Black Epoxy Coated



A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



FLUSH CUTTING TWEEZERS

15A and Miniature 215A Series


Black Epoxy Coated With Patented EZ Lever



Switzerland

15A-SW-EZ

- Rounded Head
- Tip Cutting
- Black Epoxy Coated




A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



215A-EZ

- Flat Head
- Micro Cut
- Black Epoxy Coated




A = 5.5 mm - .22"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



215AB-EZ

- Flat Head
- Micro Cut
- Black Epoxy Coated




A = 4 mm - .16"
B = 4.5 mm - .18"
C = 115 mm - 4 1/2"



215AE-EZ

- Flat Head
- Micro Cut
- Black Epoxy Coated




A = 2.5 mm - .10"
B = 3.5 mm - .18"
C = 115 mm - 4 1/2"



215ASM-EZ

- Rounded Head
- Micro Cut
- Black Epoxy Coated




A = 3.5 mm - .14"
B = 6.5 mm - .25"
C = 115 mm - 4 1/2"



215AS-EZ

- Rounded Head
- Micro Cut
- Black Epoxy Coated




A = 5.5 mm - .22"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



215AM-EZ

- Flat Head
- Micro Cut
- Black Epoxy Coated




A = 3.5 mm - .14"
B = 6.5 mm - .25"
C = 115 mm - 4 1/2"



215B-EZ

- Flat Head
- Micro Cut
- Black Epoxy Coated



A = 2.5 mm - .10"
B = 4.5 mm - .18"
C = 115 mm - 4 1/2"




FLUSH CUTTING TWEEZERS

315A Series "Red Dot" With Stronger Blades
Black Epoxy Coated With Patented EZ Lever



315AB-EZ

- Micro Strong Cut
- Black Epoxy Coated
- Red Dot




A = 4 mm - .16"
B = 4.5 mm - .18"
C = 95 mm - 3 3/4"



315A-GW-EZ

- Micro Strong Cut
- Tip Cutting
- Black Epoxy Coated
- Red Dot




A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



315AC-EZ

- Micro Strong Cut
- Tip Cutting
- Black Epoxy Coated
- Red Dot




A = 7 mm - .28"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



315A-NW-EZ

- Micro Strong Cut
- Tip Cutting
- Black Epoxy Coated
- Red Dot




A = 9 mm - .35"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



315A-SW-EZ

- Micro Strong Cut
- Tip Cutting
- Black Epoxy Coated
- Red Dot




A = 10 mm - .40"
B = 8 mm - .30"
C = 115 mm - 4 1/2"



315AE-EZ

- Micro Strong Cut
- Black Epoxy Coated
- Red Dot




A = 2.5 mm - .10"
B = 3.5 mm - .14"
C = 115 mm - 4 1/2"



315AM-EZ

- Micro Strong Cut
- Black Epoxy Coated
- Red Dot




A = 3.5 mm - .14"
B = 6.5 mm - .25"
C = 115 mm - 4 1/2"



315ASM-EZ

- Micro Strong Cut
- Black Epoxy Coated
- Red Dot



A = 3.5 mm - .14"
B = 6.5 mm - .25"
C = 115 mm - 4 1/2"



Other Models Available Upon Request


PLASTIC TWEEZERS

Light Weight - Light Cost


7 Models x 4 Different Materials = 28 Versions




P2A-DEL White Delrin 500 118 mm – 4²/₃"
P2A-STD/G Grey Static Dissipative
P2A-STD Black Static Dissipative
P2A-ESD Black Conductive
 -Straight Flat Rounded Tips



P2AB-DEL White Delrin 500 118 mm – 4²/₃"
P2AB-STD/G Grey Static Dissipative
P2AB-STD Black Static Dissipative
P2AB-ESD Black Conductive
 -Curved Flat Rounded Tips



P3C-DEL White Delrin 500 118 mm – 4²/₃"
P3C-STD/G Grey Static Dissipative
P3C-STD Black Static Dissipative
P3C-ESD Black Conductive
 -Very Fine Straight Tips




PLASTIC TWEEZERS

Light Weight - Light Cost


7 Models x 4 Different Materials = 28 Versions




P6A-DEL White Delrin 500 118 mm – 4 2/3"
P6A-STD/G Grey Static Dissipative
P6A-STD Black Static Dissipative
P6A-ESD Black Conductive
 -Very Fine Angulated Tips




P7-DEL White Delrin 500 118 mm – 4 2/3"
P7-STD/G Grey Static Dissipative
P7-STD Black Static Dissipative
P7-ESD Black Conductive
 -Very Fine Curved Tips



P35-DEL White Delrin 500 118 mm – 4 2/3"
P35-STD/G Grey Static Dissipative
P35-STD Black Static Dissipative
P35-ESD Black Conductive
 -Straight Flat Tips



P35A-DEL White Delrin 500 118 mm – 4 2/3"
P35A-STD/G Grey Static Dissipative
P35A-STD Black Static Dissipative
P35A-ESD Black Conductive
 -Straight Flat Radiused Tips



FEATURES :

Heat Resistant 240°C / 464°F

No Contamination

Non-Magnetic

Acid Resistant

Tips Do Not Spread Under Pressure

SPECIFICATION SHEET UPON REQUEST ON :

White Delrin 500

Grey Static Dissipative

Black Static Dissipative

Black Conductive